

# Flexible Signal Cables


## Braided Screen

**Uses:** For interconnection of instruments, electrical equipment, microphone and audio equipment.

**Conductor:** Tinned Copper Wire.

**Sheath:** Black - PVC V75

**Screen:** Tinned Copper Wire.

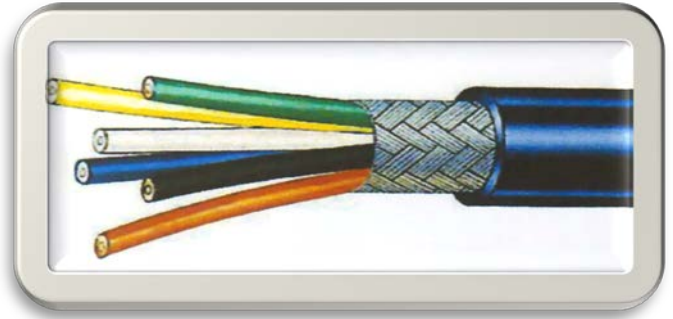

*(Not to be connected to Mains Power)*

CODE	Number Conductors	Conductor (mm)	Area (Sq.mm)	Nominal OD (mm)	Conductor Colour
CSMIC2702	2	7/0.20	0.23	2.0	R,BK
CSMIC3702	3	7/0.20	0.23	3.6	R,BL,GR
CSMIC4702	4	7/0.20	0.23	5.0	R,GN,Y,BL
CSMIC6702	6	7/0.20	0.23	4.5	R,BK,WH,BL,GN,Y
CSMIC11602	1	16/0.20	0.5	3.4	R
CSMIC21602	2	16/0.20	0.5	5.0	R,BL,
CSMIC31602	3	16/0.20	0.5	5.8	R,BL,GR
CSMIC41602	4	16/0.20	0.5	6.1	R,WH,Y,GR
CSMIC61602	6	16/0.20	0.5	7.2	R,WH,Y,GR,BK,BL
CSMIC101602	10	16/0.20	0.5	9.1	See Table
CSMIC121602	12	16/0.20	0.5	9.3	See Table
CSMIC181602	18	16/0.20	0.5	10.7	See Table
CSMIC251602	25	16/0.20	0.5	12.6	See Table

WIRE	COLOUR	WIRE	COLOUR	WIRE	COLOUR
1	RED ( R )	14	R/GR	27	GR/BK
2	BLUE (BL)	15	Y/R	28	O/GR
3	GREEN (GR)	16	R/W	29	GY/GR
4	YELLOW (Y)	17	R/BK	30	Y/BN
5	WHITE (W)	18	R/BN	31	W/BN
6	BLACK (BK)	19	Y/BL	32	BN/BK
7	BROWN (BN)	20	W/BL	33	GY/BN
8	VIOLET (V)	21	BL/BK	34	Y/V
9	ORANGE (O)	22	O/BL	35	V/BK
10	PINK (P)	23	BL/GR	36	W/V
11	TURQS (T)	24	GY/BL		
12	GREY (GY)	25	Y/GR		
13	R/BL	26	W/GR		