


Automotive Cables

Twin Sheath Automotive/Marine Cable

Uses: General purpose cable for automotive applications.

Conductor: Plain Copper Wire


Sheath: Black PVC- V75

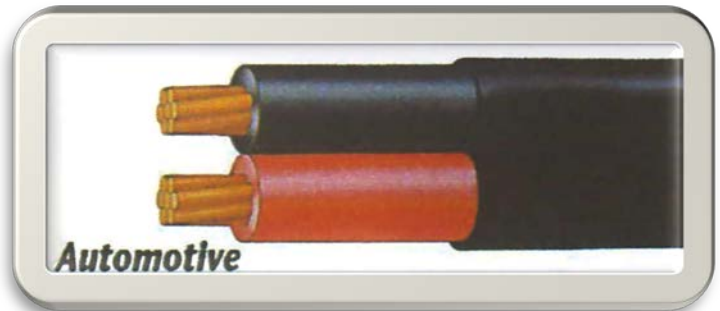

CODE	Stranding No./DIA. (mm)	Amp Ratings	Nominal O/D (mm)	Nominal Area (mm ²)	Insulation Thickness
CSTS1603	16/0.30	10	6.6 x 3.8	1.13	0.6
CSTS2603	26/0.30	15	7.1 x 4.1	1.85	0.6
CSTS4103	41/0.32	27	8.6 x 5.0	3.25	0.6
CSTS6503	65/0.30	31	5.8 x 9.9	4.59	0.6

Marine Cable (Tin Copper)


Stranding No./DIA. (mm)	Amp Ratings	Nominal O/D (mm)	Nominal Area (mm ²)	Insulation Thickness
26/0.30	15	4.0 x 6.7	1.84	0.4
65/0.30	31	5.8 x 9.9	4.59	0.6

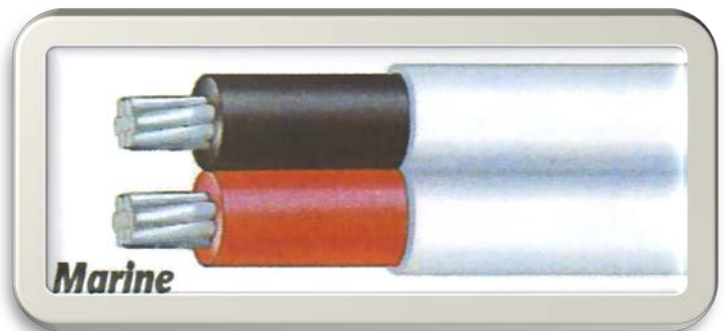

Conductor: Tinned Copper Wire

Trailer Flex

No. of Cores	Stranding No./DIA. (mm)	Amp Ratings	Nom. O/D (mm)	Nom. Area (mm ²)	Insulation Thickness
5	9/0.30	5	6.20	0.64	0.4
5	16/0.30	10	7.20	1.13	0.4
7	9/0.30	5	7.00	0.64	0.4
7	16/0.30	10	8.20	1.13	0.4

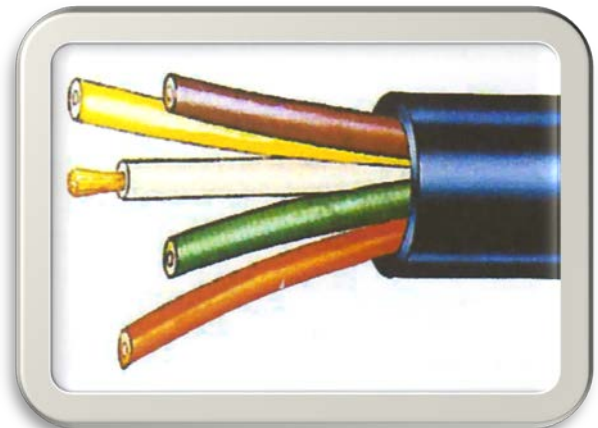

(Max Voltage 100VDC and 32VDC)

Conductor: Plain Copper Wire.