

Single Core Flex




Connecting Wires

Uses: Switchboards, Electronic, Communication and allied equipment.

Conductor: Tinned Copper Wire.

Insulation: PVC –V90HT 0.6/1KV.

Length: 100mtr or 500mtr

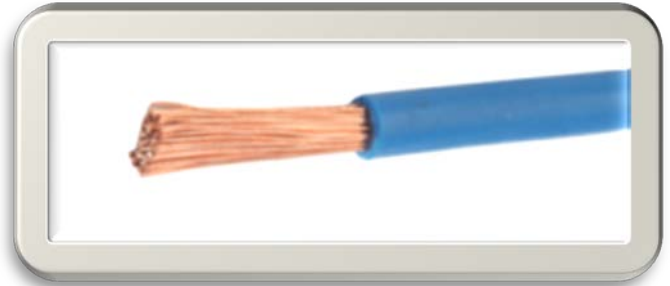

CODE	Conductor (mm)	Area (Sq. mm)	Amps	Nom. O.D. (mm)
CSSC16020	16/0.20	0.5	3	2.2
CSSC24020	24/0.20	0.75	7	2.5
CSSC32025	32/0.25	1	9	2.8
CSSC30025	30/0.25	1.5	12	3.4
CSSC50025	50/0.25	2.5	20	4.1
CSSC56030	56/0.30	4	25	4.8
CSSC84030	84/0.30	6	40	5.6
CSSC8004	80/0.40	10	65	7.3
CSSC12504	125/0.40	16	95	8.4
CSSC19304	193/0.40	25	132	9.7
CSSC27304	273/0.40	35	161	11.1

Coloured Sheaths Available

Blue (BLU)	Red (R)
White (W)	Black (BK)
Brown (BN)	Pink (P)
Orange (O)	Violet (V)
Grey (GRY)	Green/Yellow (GRN/Y)

