


Flexible Cables

Uses: Extension Leads, Industrial and Office equipment requiring 3 phase supply.

Conductor: Plain Copper Wire.

Sheath: 75°C PVC to AS3191.

Sheath Colours: White, Orange, Black and Grey.

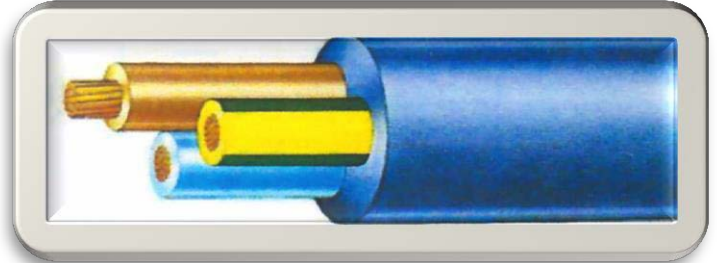

Core Colours

- 2 Core: **Brown, Blue.**
- 3 Core: **Brown, Blue, Green/Yellow.**
- 4 Core: **Brown, Blue, Green/Yellow, Black.**
- 5 Core: **Brown, Blue, Green/Yellow, Black, White.**

CODE	No. of Cores x Size (mm ²)	Stranding	Duty
CSFL22402L	2 x 0.75 Flat	24/0.20	Light
CSFL22402	2 x 0.75	24/0.20	Ordinary
CSFL23202	2 x 1.0	32/0.20	Ordinary
CSFL23002	2 x 1.5	30/0.25	Ordinary
CSFL32402	3 x 0.75	24/0.20	Ordinary or Heavy
CSFL33202	3 x 1.0	32/0.20	Ordinary or Heavy
CSFL33002	3 x 1.5	30/0.25	Ordinary or Heavy
CSFL35002	3 x 2.5	50/0.25	Ordinary or Heavy
CSFL35603	3 x 4	56/030	Ordinary or Heavy
CSFL38403	3 x 6	84/0.30	Ordinary
CSFL42402	4 x 0.75	24/0.20	Ordinary or Heavy
CSFL43202	4 x 1.0	32/0.20	Ordinary or Heavy
CSFL43002	4 x 1.5	30/0.25	Ordinary or Heavy
CSFL45002	4 x 2.5	50/0.25	Ordinary or Heavy
CSFL45603	4 x 4	56/030	Ordinary or Heavy
CSFL52402HD	5 x 0.75	24/0.20	Heavy
CSFL53202HD	5 x 1.0	32/0.20	Heavy
CSFL53002HD	5 x 1.5	30/0.25	Heavy
CSFL55002HD	5 x 2.5	50/0.25	Heavy
CSFL55603HD	5 x 4	56/030	Heavy

**Ordinary Duty Circular 75°C PVC Insulated and Sheathed 250/440V Cable to AS3191.

**Heavy Duty Circular 75°C PVC Insulated and Sheathed 0.6/1kV Cable to AS3191. Standard 1.5mm Heavy Duty.

